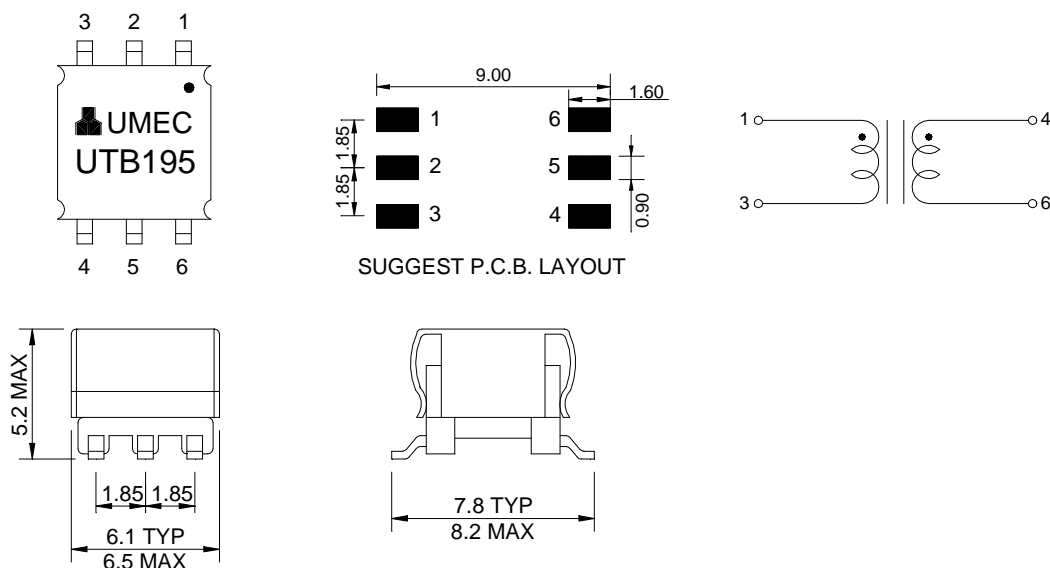


UMEC P/N:	DESCRIPTION	REVISION	DATE
UTB00195	EE5 SMD 500uH Inductor	A0	01/18

ELECTRICAL SPECIFICATIONS AT 25⁰C:

- | | |
|--------------------------------------|--|
| 1. INDUCTANCE: | 500.0uH±8%, 10kHz, 100mVAC, Ls, Each Winding |
| 2. TURNS RATIO: | 1.00 : 1.00, (1-3) : (4-6) |
| 3. DC RESISTANCE @25 ⁰ C: | 9.50 max., 1-3
9.50 max., 4-6 |
| 4. HI-POT: | 600VDC, 1s, 500uA max., 1-6 |

Dimensions:


- NOTE: 1. PACKAGING INFORMATION-TAPE AND REEL
ACCORDING TO ITEM NO. "EE5S01" OF DATA SHEET 01-00
2. Specifications are subject to change without prior notice.

UNIT: mm

AGENCY APPROVALS

The information contained in this specification is the sole property of UMEC, Ltd. Any reproduction or use without the written permission of UMEC, Ltd. Is prohibited.

Sheet 1 of 1


UMEC Europe
 Universal Microelectronics

 Homepage: www.umec.de

 UMEC elektronische Komponenten GmbH
 Kreuzenstraße 80 • D-74076 Heilbronn
 Tel. 07131/76170 • Fax 07131/761720

 e-mail: info@umec.de